

Network Working Group

Iftexhar Hussain  
Rajan Rao  
Marco Sosa  
Infinera  
Abinder Dhillon  
Fujitsu  
October 16, 2013

Internet Draft  
Intended status: Standard Track  
Expires: Apr 16, 2014

OSPFTE extension to support GMPLS for Flex Grid  
draft-dhillon-ccamp-super-channel-ospfte-ext-06.txt

## Abstract

This document specifies the extension to TELINK LSA of OSPF routing protocol [RFC4203] [3] in support of GMPLS [1] for flex-grid networks [2].

## Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at  
<http://www.ietf.org/ietf/lid-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at  
<http://www.ietf.org/shadow.html>

This Internet-Draft will expire on Apr 16, 2014.

## Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

1. Introduction.....	2
2. Terminology.....	3
3. Interface Switching Capability Descriptor.....	3
3.1. Switch Capability Specific Information .....	5
3.2. BW sub TLV: Bit Map format.....	5
3.2.1. Meaning of sub TLV fields.....	5
3.3. BW sub TLV: List and Rage format.....	7
3.3.1. Meaning of sub TLV fields.....	7
3.4. BW advertisement procedure.....	8
4. Examples.....	8
4.1. Example: BW advertisement without any service present.....	8
4.2. Example: How to use advertized Bandwidth.....	9
5. Security Considerations.....	10
6. IANA Considerations.....	10
7. References.....	10
7.1. Normative References.....	10
7.2. Informative References.....	10
8. Acknowledgments.....	11

### 1. Introduction

To enable scaling of existing transport systems to ultra-high data rates of 1 Tbps and beyond, next generation systems providing super-channel[2] switching capability are currently being developed. To allow efficient allocation of optical spectral bandwidth for such high bit rate systems, International Telecommunication Union Telecommunication Standardization Sector (ITU-T) is extending the

G.694.1 grid standard (termed ``Fixed-Grid'') to include flexible grid (termed ``Flex-Grid'') support [10].

This document defines OSPF-TE extensions in support of flex-grid networks.

Figure-1 shows a network capable of switching in Flexible-Grid[10]. The physical media/Fiber is modeled as a TE-Link to advertise spectrum (bandwidth) availability. This information is used during Flex-grid LSP[10] creation (also called super-channel LSPs[2]). This draft defines extensions to ISCD in support of Flexible-Grid.

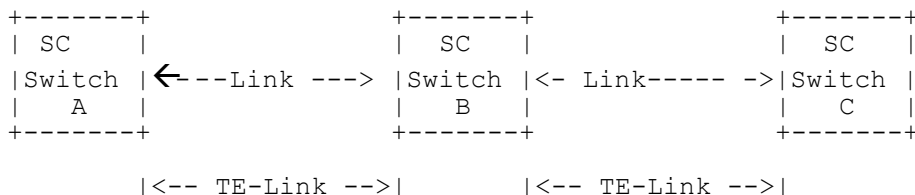


Figure 1: TE-Links

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [RFC2119].

## 3. Interface Switching Capability Descriptor

The Interface Switching Capability Descriptor describes switching capability of an interface [RFC 4203]. This document defines a new Switching Capability value for Flex Grid [FLEX-GRID] as follows:

Value	Type
102 (TBA by IANA)	Super-Channel-Switch-Capable (SCSC)

Switching Capability and Encoding values MUST be used as follows:

Switching Capability = SCSC

Encoding Type = Lambda [as defined in RFC3471]

The Interface Switching Capability Descriptor is a sub-TLV (of type 15) of the Link TLV. The length is the length of value field in Octets. The format of the value field is as shown below:

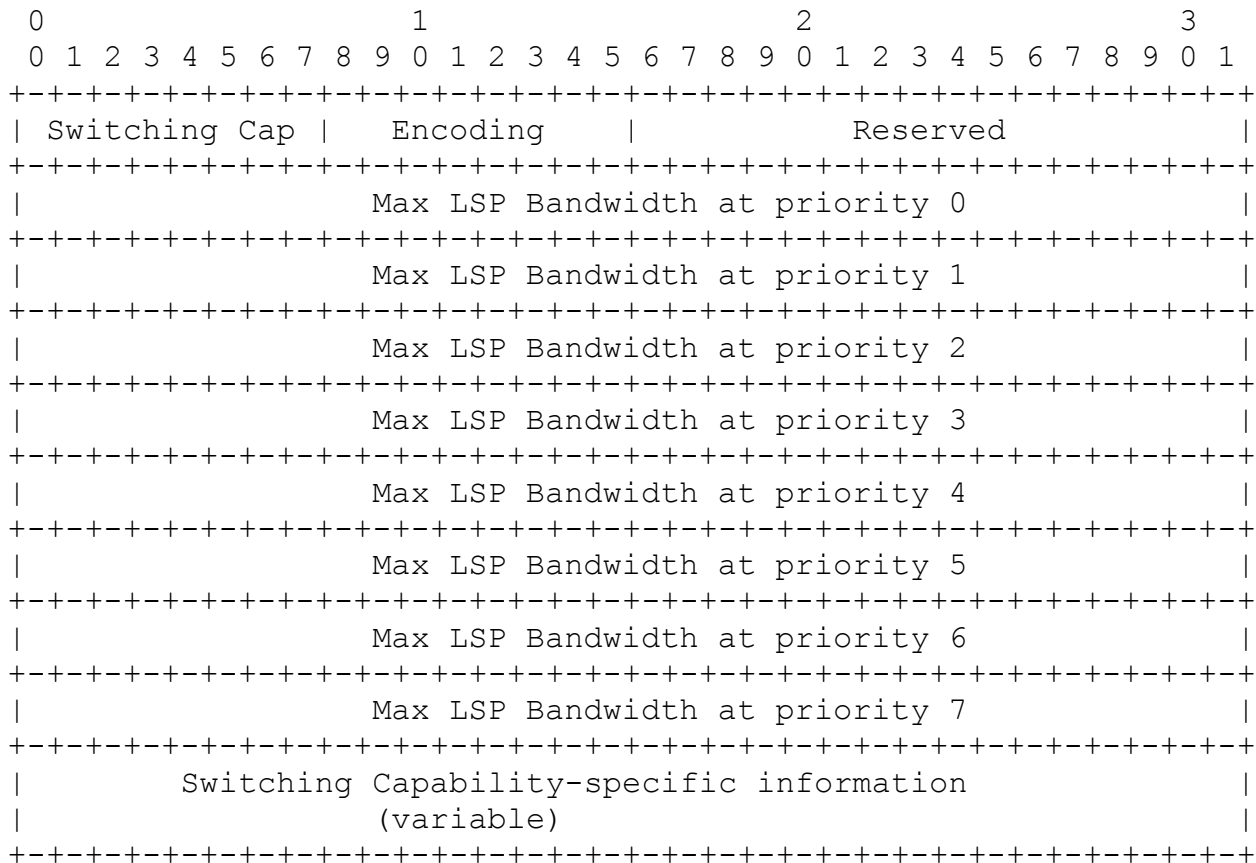


Figure 2: ISCD & SCSI

Max LSP Bandwidth will be based on Max Slot Width field in BW-sub-TLV (Ref to section 3.1 for details on BW sub-TLV) and the modulation format used.

### 3.1. Switch Capability Specific Information

The technology specific part of the ISCD can include a variable number of sub-TLVs. We propose to encode Slice Information in Bandwidth sub-TLVs under SCSI field. The format of BW sub-TLVs is as shown below.

[Editor's note: To provide options similar to Label set field defined in [9], we have included 2 variants to advertise slice level information. These are bit-format and list/range format].

### 3.2. BW sub TLV: Bit Map format

The figure below shows format of Type=1 sub-TLV for encoding slice information in bit-map format. This sub-TLV must be repeated for each priority that is supported on the Te-link.

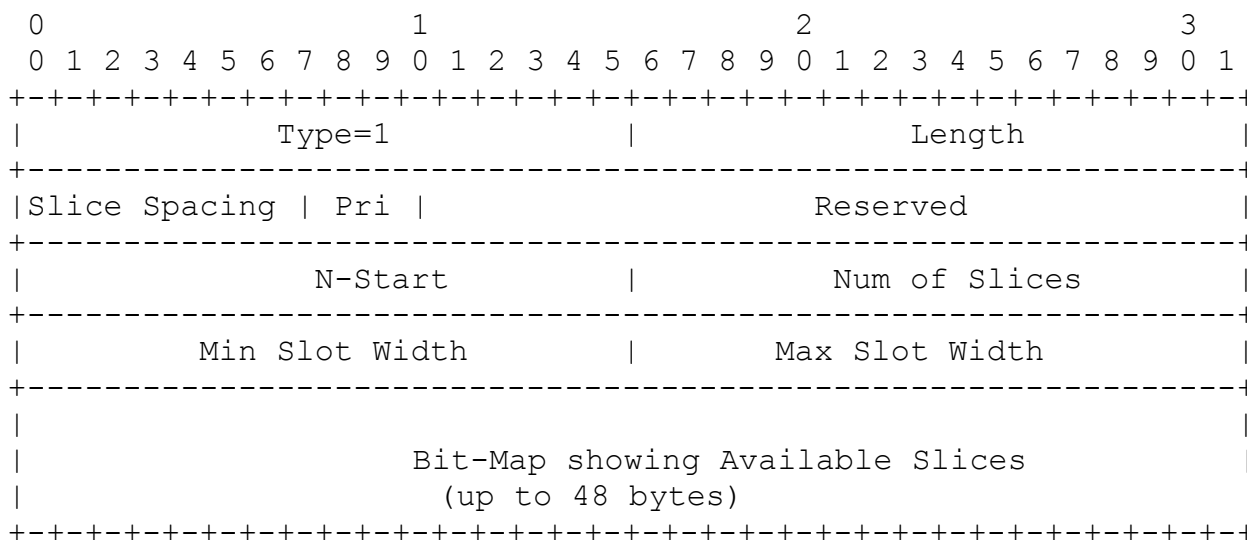


Figure 3: Type=1 BW sub TLV in Bit-Map format

#### 3.2.1. Meaning of sub TLV fields

- o Slice Spacing: 8-bit field (S.S) which can take one of the values as shown in table below.
  - o For e.g., the 12.5GHz spacing is specified by setting this field to value 4.

S.S. (GHz)	Value
Reserved	0
100	1
50	2
25	3
12.5	4
Future use	5 - 15

Table 1: Slice Spacing Values

- o Priority: 3-bit field
  - o 3-bit field to identify one of the 8 priorities for which Slice information (BW) is advertised.
- o N-Start: 16-bit field
  - o Is a two's complement integer to specify start of the grid
  - o Use center freq formula to determine start of spectrum
- o Number of slices: 16-bit field
  - o Total number of slices advertised for the link. This includes (available plus consumed).
- o Minimum Slot Width: 16-bit field
  - o This is a positive integer value
  - o This field is similar to Min LSP BW field. The value in this field is used to determine the smallest frequency slot width that the advertising node can allocate for an LSP. This is defined by the following equation:  
 Smallest Frequency slot width = Slice Spacing \* integer value in 'Minimum Slot Width' field
- o Maximum Slot Width: 16-bit field
  - o This is a positive integer value
  - o This field is used to determine the Maximum contiguous frequency slot width that the advertising node can allocate for an LSP. This is defined by the following equation:  
 Largest Contiguous Frequency slot width = Slice Spacing \* integer value in 'Maximum Slot Width' field
- o Available slices encoded as bit-map
  - o Each bit represents availability of one slice of width identified by S.S field
  - o Zero: Available ; One: occupied
  - o Padding MUST be used to align with 32 bit boundary.

### 3.3. BW sub TLV: List and Range format

The figure below shows format of Type=2 sub-TLV for encoding slice information in list/range format. This sub-TLV must be repeated for each priority that is supported on the Te-Link.

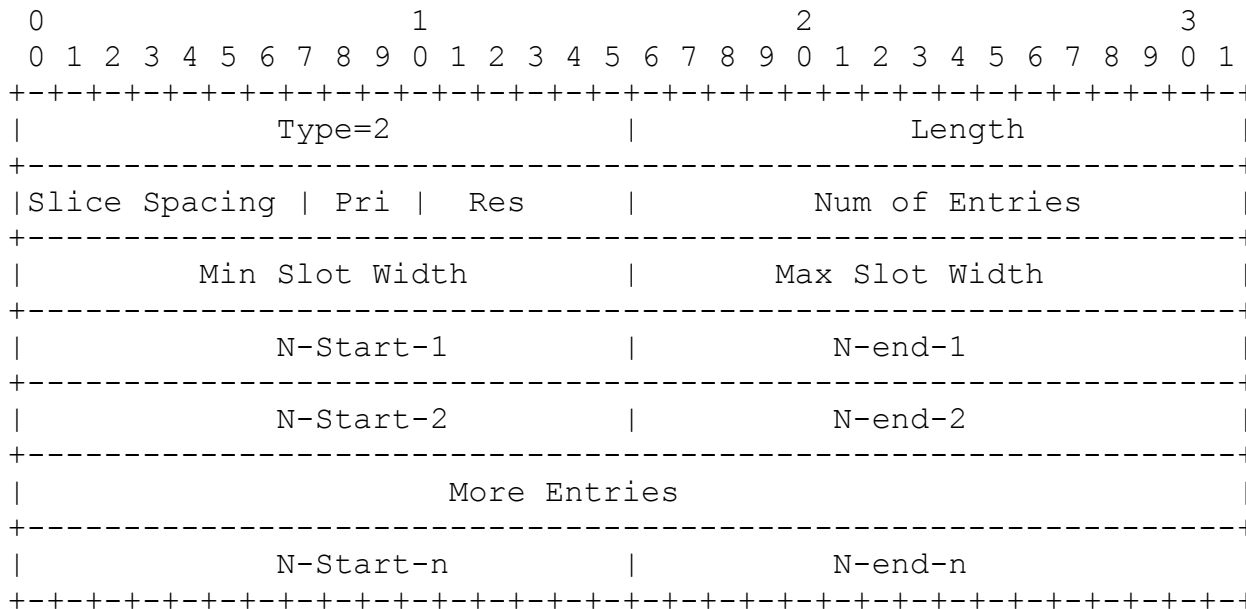


Figure 4: Type=2 BW sub TLV in List/Range format

#### 3.3.1. Meaning of sub TLV fields

- o The meaning of above fields is same as in Type=1 BW-sub-TLV. For details refer to section 3.2.1.
  - o Slice Spacing,
  - o Priority,
  - o Maximum Slot Width &
  - o Minimum Slot Width
- o Number of Entries: 16-bit field
  - o Is a positive integer value.
  - o Total number of N-start & N-End rows advertised for the link.
- o N-Start-x: 16-bit field
  - o Is a two's complement integer value (+ve, -ve or zero) to specify start of the grid.

- o Use center freq formula to determine start of spectrum
- o N-end-x: 16-bit field
  - o Is a two's complement integer value (+ve, -ve or zero) to specify end of the list/range.
  - o Use center freq formula to determine end of spectrum

### 3.4. BW advertisement procedure

This section describes bandwidth advertisement for Te-Links capable SCSC.

- o Optical nodes capable of Super Channel Switching advertise slices of certain width available based on the frequency spectrum supported by the node (e.g. C band, extended C-band). For example, node(s) supporting extended C-band will advertise 384 slices.
- o The BW advertisement involves an ISCD containing
  - o Slice information in bit-map format (Type=1 BW-sub-TLV) where each bit corresponds to a single slice of width as identified by S.S field. OR
  - o Slice information in list/range format (Type=2 BW-sub-TLV) where each 32-bit entry represents an individual slice or list or range.
- o The slice position/numbering in Type=1 sub-TLV is identified based on N-start field. The N-start field is derived based on ITU center frequency formula.
- o The advertising node MUST also set Number of Slices field.
- o Minimum & Maximum slot width fields are included to allow for any restrictions on the link for carrying super channel LSPs.
- o The BW advertisement is priority based and up to 8 priority levels are allowed.
- o The node capable of supporting one or more priorities MUST set the priority field and include BW-sub TLV for each of the priority supported.

## 4. Examples

### 4.1. Example: BW advertisement without any service present

Figure 5 shows an example of BW sub-TLV for a te-link which has no service established over it yet. Attributes of BW sub-TLV in the te-link are:





## 5. Security Considerations

<Add any security considerations>

## 6. IANA Considerations

IANA needs to assign a new Grid field value to represent ITU-T Flex-Grid.

## 7. References

### 7.1. Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.

### 7.2. Informative References

- [1] Berger, L., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Functional Description", RFC 3471, January 2003
- [2] Iftexhar H, Abinder , Zhong , Marco , "Generalized Label for Super-Channel Assignment on Flexible Grid", draft-hussain-ccamp-super-channel-label-04.txt, July 2011.
- [3] K. Kompella, Y., " OSPF Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", RFC 4203, Oct 2005
- [4] Lee, Y., Ed., "Framework for GMPLS and Path Computation Element (PCE) Control of Wavelength Switched Optical Networks (WSOs)", RFC 6163, April 2011
- [5] M. Jinno et. al., "Spectrum-Efficient and Scalable Elastic Optical Path Network: Architecture, Benefits and Enabling Technologies", IEEE Comm. Mag., Nov. 2009, pp. 66-73.
- [6] S. Chandrasekhar and X. Liu, "Terabit Super-Channels for High Spectral Efficiency Transmission ",in Proc. ECOC 2010, paper Tu.3.C.5, Torino (Italy), September 2010.
- [7] ITU-T Recommendation G.694.1, "Spectral grids for WDM applications: DWDM frequency grid", June 2002

- [8] Oscar G, et al., "Framework and Requirements for GMPLS based control of Flexi-grid DWDM networks", draft-ietf-ccamp-flexi-grid-fwk-00, work in progress.
- [9] G. Bernstein, Y. Lee, D. Li, W. Imajuku, "General Network Element Constraint Encoding for GMPLS Controlled Networks", work in progress: draft-ietf-ccamp-general-constraint-encode-05, May 2011
- [10] [FLEX-GRID] "ITU-T Recommendation G.694.1, Spectral grids for WDM applications: DWDM frequency grid", November 2012.

#### 8. Acknowledgments

The authors would like to thank Khuzema Pithewan, Ashok Kunjidhpatham & Mohit Misra for their valuable comments.

Authors' Addresses

Abinder Dhillon  
Fujitsu  
Richardson, TX  
Email: Abinder.Dhillon@us.fujitsu.com

Iftekhar Hussain  
Infinera  
140 Caspian Ct., Sunnyvale, CA 94089  
Email: ihussain@infinera.com

Rajan Rao  
Infinera  
140 Caspian Ct., Sunnyvale, CA 94089  
Email: rrao@infinera.com

Marco Sosa  
Infinera  
140 Caspian Ct., Sunnyvale, CA 94089  
Email: msosa@infinera.com

Contributor's Addresses

Biao Lu  
Email: blu@infinera.com

Subhendu Chattopadhyay  
Email: schattopadhyay@infinera.com

Harpreet Uppal  
Email: harpreet.uppal@infinera.com  
Infinera  
140 Caspian Ct., Sunnyvale, CA 94089